


2404-MSAK



Pitch **1.25mm** Wire to Board (Lock) Connectors - SMT Type

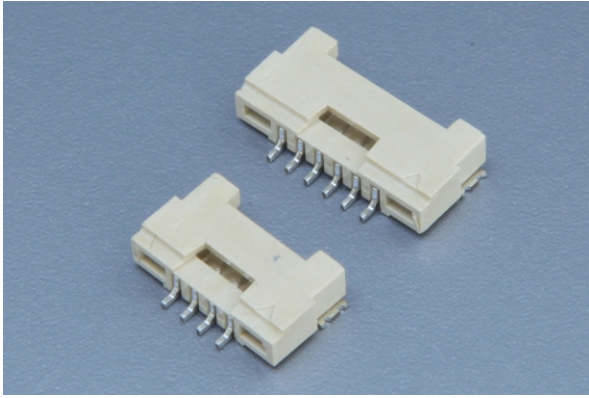

PERFORMANCE

Electrical Rating: AC/DC 150V 1A
 額定電壓電流
 Insulation Resistance: 500MΩ min.
 絕緣阻抗
 Withstanding Voltage: 500V AC/minute
 耐電壓
 Temperature Range: -25°C~+85°C
 適用溫度



1.25mm

CONNECTOR

Part No.: **MSAK2404P4~MSAK2404P6 RF:A**

產品編號

Material: Housing: Nylon 94V-0

材質 塑膠座

Contact Pin: Brass, Tin-plated









接觸針 黃銅, 鍍錫

Reinforcement: Phos.

補強片 磷青銅

Packing: 1,500pcs/reel

包裝數量

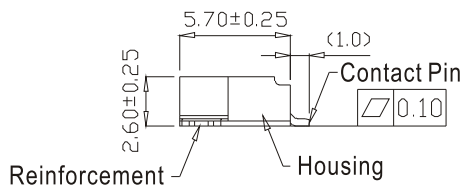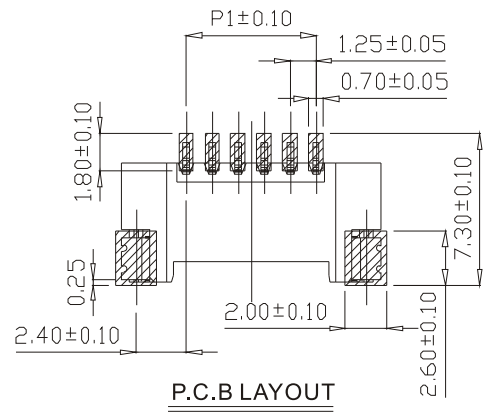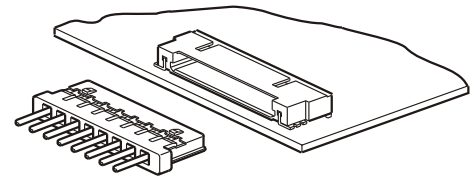

Part No.	Rf.	L	L1	P1
MSAK2404P4	A	9.95	5.50	3.75
MSAK2404P6	A	12.45	8.00	6.25

Behave in conformity with continual product development policy, Sin Sheng (STM) reserves the right of specification changing of contents described in this catalogue at any time and without prior notice. Please contact the sales department nearby for most updated information.
 由於產品持續開發的政策, 信盛(STM)保留隨時變更本目錄所述之規格且不需提前通知的權利, 請速聯繫業務處查詢最新的產品資訊。

2404 Wire to Board (Lock) Connectors - SMT Type

CONNECTOR

Part No.: **MSAK2404P4~MSAK2404P6**

產品編號

Material: Housing: LCP 94V-0

材質 塑膠座

Contact Pin: Brass, Tin-plated

接觸針 黃銅, 鍍錫

Reinforcement: Phos.

補強片 磷青銅

Packing: 1,500pcs/reel

包裝數量

1.25mm

PERFORMANCE

Electrical Rating: AC/DC 150V 1A

額定電壓電流

Insulation Resistance: 500MΩ min.





絕緣阻抗

Withstanding Voltage: 500V AC/minute

耐電壓

Temperature Range: -25°C~+85°C

適用溫度

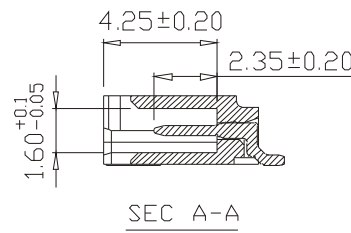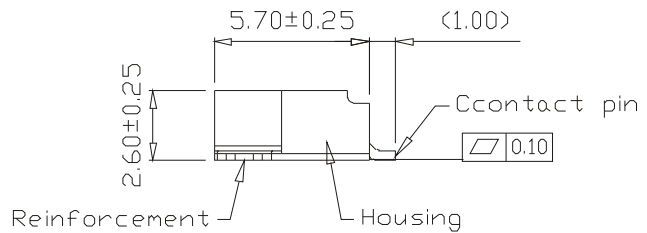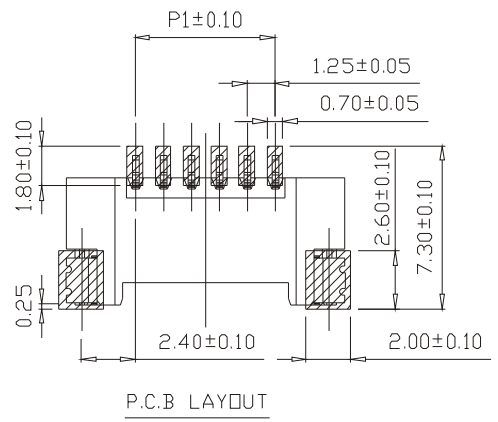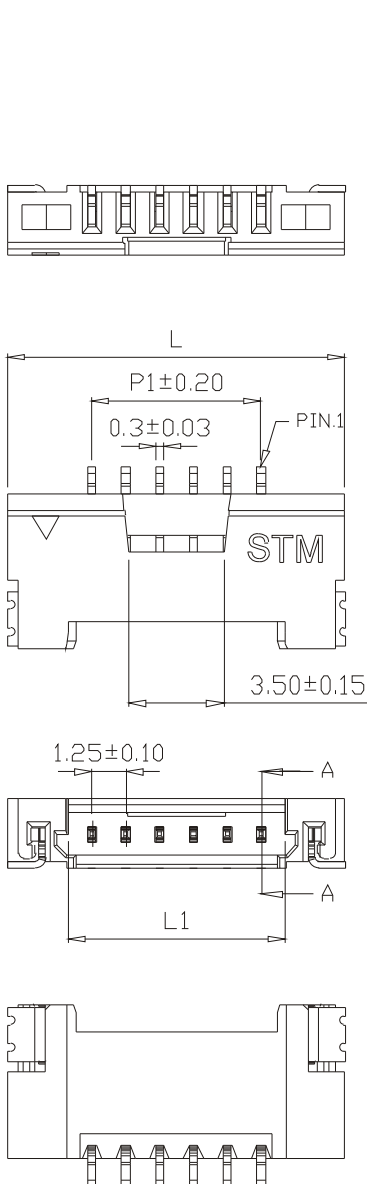

Part No.	Rf.	L	Li	Pi
MSAK2404P4	. 9.95	5.50	3.75	
MSAK2404P6	. 12.45	8.00	6.25	