


24050



Pitch **0.5mm** FPC Connectors - SMT Type

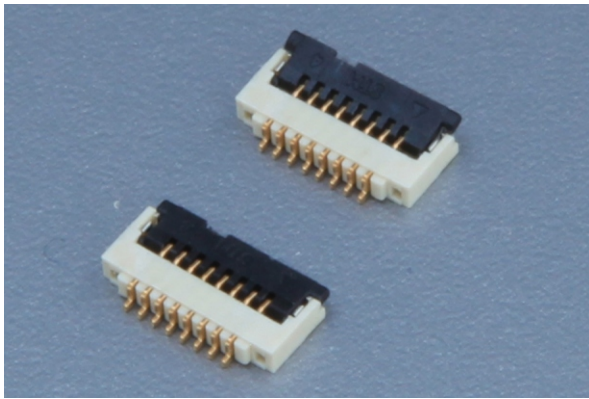

PERFORMANCE

Electrical Rating: AC/DC 50V 0.5A

額定電壓電流

Insulation Resistance: 500M Ω min.

絕緣阻抗

Withstanding Voltage: 150V AC/minute

耐電壓

Temperature Range: -55 $^{\circ}$ C~+85 $^{\circ}$ C

適用溫度



0.5mm

CONNECTOR

Part No.: **MSAK24050P8**

產品編號

Material: Housing: LCP 94V-0

材質 塑膠座

Contact Pin: PB

接觸針 磷青銅

Applicable Wire: FPC: 0.3mm thick flat cable.

適用電線

Packing: 2,000PCS (REEL)

包裝數量

Please contact the sales representative
nearby for further information.

進一步資訊請就近連絡業務員!

TOLERANCE	
.0	±0.25
.00	±0.15
.000	±0.0